SECTION 1 CHEMICAL PRODUCT AND IDENTIFICATION

United States Gypsum Company

550 West Adams Street Chicago, Illinois 60661-3637

A Subsidiary of USG Corporation

Product Safety: 1 (800) 507-8899

www.usg.com

Version Date: January 1, 2011

Version: 7

PRODUCT(S) SHEETROCK® All Purpose Joint Compound

CHEMICAL FAMILY / **GENERAL CATEGORY**

Joint Treatment

SYNONYMS

Joint Compound, Taping Compound, Mud

SECTION 2 HAZARD IDENTIFICATION

EMERGENCY OVERVIEW:

ΔWARNING!

This product is not expected to produce any unusual hazards during normal use. Exposure to high dust levels may irritate the skin, eyes, nose, throat, or upper respiratory tract. Prolonged and repeated breathing of respirable mica dust may cause lung disease (pneumoconiosis).

POTENTIAL HEALTH EFFECTS (See Section 11 for more information)

ACUTE:

Inhalation	Exposure to dust generated during the handling or sanding of the product may cause temporary irritation to eyes, skin, nose, throat, and upper respiratory tract. Persons subjected to large amounts of this dust will be forced to leave area because of nuisance conditions such as coughing, sneezing and nasal irritation. Labored breathing may occur after excessive inhalation. If respiratory symptoms persist, consult physician.
------------	--

Dust can cause temporary mechanical irritation of eyes. If burning, redness, itching, pain or other Eyes symptoms persist or develop, consult physician.

Ingestion None known.

None known.

CHRONIC:

Skin

Inhalation

Prolonged and repeated breathing of respirable mica dust may cause lung disease (pneumoconiosis). The extent and severity of lung injury correlates with the length of exposure and dust concentration. Exposures to respirable crystalline silica are not expected during the normal use of this product; however, actual levels must be determined by workplace hygiene testing. Prolonged and repeated exposure to airborne free respirable crystalline silica can result in lung disease (i.e., silicosis) and/or lung cancer. The development of silicosis may increase the risks of additional health effects. The risk of developing silicosis is dependent upon the exposure intensity and duration.

Eyes None known.

Skin None known.

Ingestion None known. TARGET ORGANS: Eyes, skin and respiratory system.

PRIMARY ROUTES OF ENTRY: Inhalation, eyes and skin contact.

CARCINOGENICITY CLASSIFICATION OF INGREDIENT(S) All substances listed are associated with the nature of the raw materials used in the manufacture of this product and are not independent components of the product formulation. All substances, if present, are at levels well below regulatory limits. See Section 11: Toxicology Information for detailed information.

MATERIAL	IARC	NTP	ACGIH	CAL- 65
Crystalline silica	1	1	A2	Listed

IARC - International Agency for Research on Cancer: 1- Carcinogenic to humans; 2A – Probably carcinogenic to humans; 2B – Possibly carcinogenic to humans; 3 - Not classifiable as a carcinogen; 4 – Probably not a carcinogen

NTP – National Toxicology Program (Health and Human Services Dept., Public Health Service, NIH/NIEHS): 1-Known to be carcinogen; 2- Anticipated to be carcinogens

ACGIH – American Conference of Governmental Industrial Hygienists: A1 – Confirmed human carcinogen; A2 – Suspected human carcinogen; A3 – Animal carcinogen; A4 - Not classifiable as a carcinogen; A5 – Not suspected as a human carcinogen

CAL-65 – California Proposition 65 "Chemicals known to the State of California to Cause Cancer"

Respirable crystalline silica: IARC: Group 1 carcinogen, NTP: Known human carcinogen. The weight percent of crystalline silica given represents total quartz and not the respirable fraction. The weight percent of respirable silica has not been measured in this product.

Food and Drug Administration [CFR Title 21, v.3, sec 184.1409] – Ground limestone is Generally Recognized as Safe (GRAS).

POTENTIAL ENVIRONMENTAL EFFECTS: This product has no known adverse effect on ecology. (See Section 12 for more information.)

SECTION 3 COMPOSITION, INFORMATION ON INGREDIENTS

MATERIAL	WT%	CAS#	
Limestone	>65	1317-65-3	
Or Dolomite		16389-88-1	
Mica	<20	12001-26-2	
Attapulgite	<5	12174-11-7	
Vinyl Alcohol Polymer	<5	9002-89-5	
Hydroxypropyl Amylopectin Phosphate	<5	113894-92-1	
Crystalline Silica	<5	14808-60-7^	

All ingredients of this product are included in the U.S. Environmental Protection Agency's Toxic Substances Control Act Chemical Substance Inventory and the Canadian Domestic Substances List (DSL).

^The weight percent for silica represents total quartz and not the respirable fraction.

SECTION 4 FIRST AID MEASURES

FIRST AID PROCEDURES

Inhalation

Remove to fresh air. Leave the area of exposure and remain away until coughing and other symptoms subside. Other measures are usually not necessary, however if conditions warrant, contact physician.

Ingestion	This product is not intended to be ingested or eaten. If gastric disturbance occurs, call physician.
Skin	Wash with mild soap and water. If irritation persists, consult physician.
Eyes	In case of contact, do not rub or scratch your eyes. To prevent mechanical irritation, flush thoroughly with water for 15 minutes. If irritation persists, consult physician.

MEDICAL CONDITIONS WHICH MAY BE AGGRAVATED: Pre-existing upper respiratory and lung diseases such as, but not limited to, bronchitis, emphysema and asthma. Pre-existing skin diseases such as, but not limited to, rashes and dermatitis.

NOTES TO PHYSICIAN: Treatment should be directed at the control of symptoms and the clinical condition.

SECTION 5 FIRE FIGHTING MEASURES

General Fire Hazards		None known		
Extinguishing Media		Water or use extinguishing media appropriate for surrounding fire.		
Special Fire Fighting Procedures		Wear appropriate personal protective equipment. See section 8.		
Unusual Fire/ Explosion Hazards		None known		
Hazardous Combustion Products		Above 800° C – limestone may decompose to calcium oxide (CaO) and carbon dioxide (CO2).		
Flash Point	Not Determined		Auto Ignition	Not Applicable
Method Used	Not Applicable		Flammability	Not Applicable
Upper Flammable Limit (UFL) Not De		Determined	Classification	Not Applicable
Lower Flammable Limit (LFL)	Not I	Determined	Rate of Burning	Not Applicable

SECTION 6 ACCIDENTAL RELEASE MEASURES

CONTAINMENT: No special precautions. Wear appropriate personal protective equipment. See section 8.

CLEAN-UP: Use normal clean up procedures. No special precautions.

DISPOSAL: Follow all local, state, provincial and federal regulations. Never discharge large releases directly into sewers or surface waters.

SECTION 7 HANDLING AND STORAGE

HANDLING: Avoid dust contact with eyes and skin. Wear the appropriate eye and skin protection against dust (See Section 8). Minimize dust generation and accumulation. Avoid breathing dust. Wear the appropriate respiratory protection against dust in poorly ventilated areas and if TLV is exceeded (see Sections 2 and 8). Use good safety and industrial hygiene practices.

STORAGE: Store in a cool, dry, ventilated area away from sources of heat, moisture and incompatibilities (see Section 10).

SECTION 8 EXPOSURE CONTROLS/PERSONAL PROTECTION

MATERIAL	WT%	TLV (mg/m ³)	PEL(mg/m ³)
Limestone	>65	10	15(T)/5(R)
Or Dolomite		10	15(T)/5(R)
Mica	<20	3 (R)	20 mppcf
Attapulgite	<5	(NE)	(NE)
Vinyl Alcohol Polymer	<5	(NE)	(NE)
Hydroxypropyl Amylopectin Phosphate	<5	(NE)	(NE)
Crystalline Silica	<5	0.025(R)	0.1(R)

(T)-Total; (R)-Respirable; (NE)-Not Established; (C)-Ceiling; (STEL)-Short-term exposure limit

(F)-Fume; (Du)-Dust; (M)-Mist

ppm-part per million; f/cc-fiber per cubic centimeter; mppcf- million particles per cubic foot

ENGINEERING CONTROLS: Provide ventilation sufficient to control airborne dust levels. If user operations generate airborne dust, use ventilation to keep dust concentrations below permissible exposure limits. Where general ventilation is inadequate, use process enclosures, local exhaust ventilation, or other engineering controls to control dust levels below permissible exposure limits.

RESPIRATORY PROTECTION: Wear a NIOSH/MSHA-approved respirator equipped with particulate cartridges when dusty in poorly ventilated areas, and if TLV is exceeded. A respiratory program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. If engineering controls are not possible, wear a properly fitted NIOSH/MSHA-approved particulate respirator.

OTHER PERSONAL PROTECTIVE EQUIPMENT:

Eye/Face	Wear eye protection, safety glasses or goggles, to avoid possible eye contact.
Skin	Wear gloves and protective clothing to prevent repeated or prolonged skin contact.
General	Selection of Personal Protective Equipment will depend on environmental working conditions and operations.

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Appearance	White to off white	Vapor Density (Air = 1)	Not Applicable
Odor	Low to no odor	Specific Gravity (H ₂ O = 1)	~2.3 - 2.6
Odor Threshold	Not Determined	Solubility in water (g/100g)	~ 0.15 g/100 g
Physical State	Solid/ Powder	Partition Coefficient	Not Determined
pH @ 25 ° C	~7.5-9	Auto-ignition Temp	Not Determined
Melting Point	Not Applicable	Decomposition Temp	Not Determined

Freezing Point	Not Applicable	Viscosity	Not Applicable
Boiling Point	Not Applicable	Particle Size	Varies
Flash Point	Not Determined	Bulk Density	~ 40-80 lb/ft3
Evaporation Rate (BuAc = 1)	Not Applicable	Molecular Weight	Mixture
Upper Flammable Limit (UFL)	Not Determined	VOC Content	Zero g/L
Lower Flammable Limit (LFL)	Not Determined	Percent Volatile	Zero
Vapor Pressure (mm Hg)	Not Applicable		

SECTION 10 CHEMICAL STABILITY AND REACTIVITY

STABILITY	Stable.
CONDITIONS TO AVOID	Contact with incompatibles (see below).
INCOMPATIBILITY	None known.
HAZARDOUS POLYMERIZATION	None known.
HAZARDOUS DECOMPOSITION	Above 800° C – limestone may decompose to calcium oxide (CaO) and carbon dioxide (CO2).

SECTION 11 TOXICOLOGICAL INFORMATION

ACUTE EFFECTS: None known.

CHRONIC EFFECTS / CARCINOGENICITY:

Mica: Prolonged and repeated breathing of respirable mica dust may cause lung disease (pneumoconiosis). The extent and severity of lung injury correlates with the length of exposure and dust concentration.

Crystalline Silica: Exposures to respirable crystalline silica are not expected during the normal use of this product; however, actual levels must be determined by workplace hygiene testing. The weight percent of respirable crystalline silica may not have been measured in this product. Prolonged and repeated exposure to airborne free respirable crystalline silica can result in lung disease (i.e., silicosis) and/or lung cancer. The development of silicosis may increase the risks of additional health effects. Smoking in combination with silica exposures increases the risk of cancer. The risk of developing silicosis is dependent upon the exposure intensity and duration.

In June, 1997, IARC classified crystalline silica (quartz and cristobalite) as a human carcinogen. In making the overall evaluation, the IARC Working Group noted that carcinogenicity in humans was not detected in all industrial circumstances studied. Carcinogenicity may be dependent on inherent characteristics of the crystalline silica or on external factors affecting its biological activity or distribution of its polymorphs.

IARC states that crystalline silica inhaled in the form of quartz or cristobalite from occupational sources is carcinogenic to humans (Group 1).

SECTION 12 ECOLOGICAL INFORMATION

ENVIRONMENTAL TOXICITY: This product has no known adverse effect on ecology.

Ecotoxicity value Not determined.

SECTION 13 DISPOSAL CONSIDERATIONS

WASTE DISPOSAL METHOD: Dispose of material in accordance with federal, state, and local regulations. Never discharge directly into sewers or surface waters. Consult with environmental regulatory agencies for guidance on acceptable disposal practices.

SECTION 14 TRANSPORT INFORMATION

	DN: Not a hazardous material per DOT shipping requirements. Not classified or regulated.
Shipping Name	Same as product name.
Hazard Class	Not classified.
UN/NA #	None. Not classified.
Packing Group	None.
Label (s) Required	Not applicable.
GGVSec/MDG-Code	Not classified.
ICAO/IATA-DGR	Not applicable.
RID/ADR	None.
ADNR	None.

SECTION 15 REGULATORY INFORMATION

UNITED STATES REGULATIONS

All ingredients of this product are included in the U.S. Environmental Protection Agency's Toxic Substances Control Act Chemical Substance Inventory.

MATERIAL	WT%	3 0 2	3 0 4	3 1 3	CERCLA	CAA Sec. 112	RCRA Code
Limestone	>65	NL	NL	NL	NL	NL	NL
Or Dolomite		NL	NL	NL	NL	NL	NL
Mica	<20	NL	NL	NL	NL	NL	NL
Attapulgite	<5	NL	NL	NL	NL	NL	NL
Vinyl Alcohol Polymer	<5	NL	NL	NL	NL	NL	NL

Hydro	xypropyl Amylopectin Phosphate	<5	NL	NL	NL	NL	NL	NL
Cryst	alline Silica	<5	NL	NL	NL	NL	NL	NL
Key:	NL = Not Listed							
	SARA Title III Section 302 (EPCRA) Extremely Hazar	dous Substances:	Thres	hold P	lanning	Quant	tity (TP	Q)
	SARA Title III Section 304 (EPCRA) Extremely Hazardous Substances: Reportable Quantity (RQ)							
	SARA Title III Section 313 (EPCRA) Toxic Chemicals: X= Subject to reporting under section 313 CERCLA Hazardous Substances: Reportable Quantity (RQ)							
	CAA Section 112 (r) Regulated Chemicals for Accidental Release Prevention: Threshold Quantities(TQ)							
	RCRA Hazardous Waste: RCRA hazardous waste code							

CANADIAN REGULATIONS

This product has been classified in accordance with the hazard criteria of Controlled Product regulations and the MSDS contains all the information required by the Controlled Products Regulations. All ingredients of this product are included in the Canadian Domestic Substances List (DSL).

MATERIAL	WT%	IDL Item #	WHMIS Classification
Limestone	>65	Not Listed	D2A
Or Dolomite		Not Listed	Not Listed
Mica	<20	1088	Not Listed
Attapulgite	<5	Not Listed	Not Listed
Vinyl Alcohol Polymer	<5	Not Listed	Not Listed
Hydroxypropyl Amylopectin Phosphate	<5	Not Listed	Not Listed
Crystalline Silica	<5	1406	D2A

IDL Item#: Canadian Hazardous Products Act - Ingredient Disclosure List Item #

WHMIS Classification: Workplace Hazardous Material Information System

Risk and Safety Phrases defined by European Union Directive 67/548/EEC (Annex III and IV)


R-Phrase(s): R36/37/38 S-Phrase(s): S51 S38 S39

SECTION 16 OTHER INFORMATION

Label Information

∆ WARNING!

Dust can cause irritation to eyes, skin and respiratory tract. Use wet-sanding to reduce dust created. Wear eye, skin and respiratory protection as necessary per working conditions. If eye contact occurs flush with water for 15 minutes. Do not ingest. If ingested, call physician. Frequent breathing of mica dust can cause lung disease (pneumoconiosis). Product safety information: 800-507-8899 or usg.com. Customer Service: 800 USG-4-YOU (800 874-4968). KEEP OUT OF REACH OF CHILDREN.

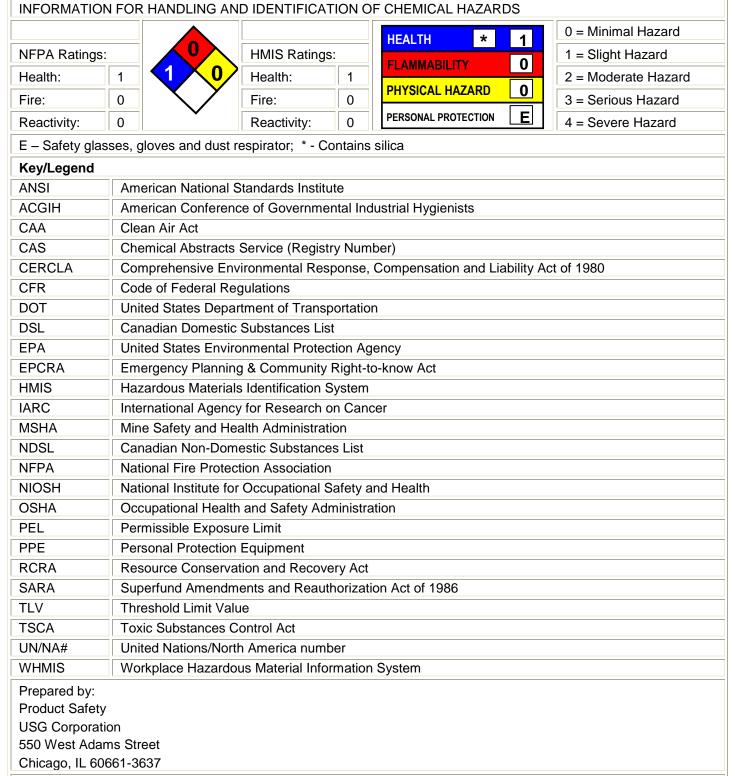

The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for his/her own particular use.